

TCR-250 AIR HOIST



RAISING EXPECTATIONS

DIMENSIONS

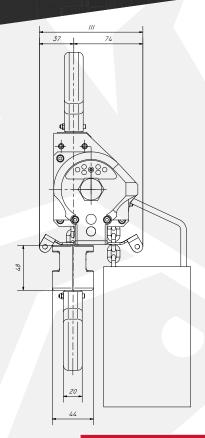

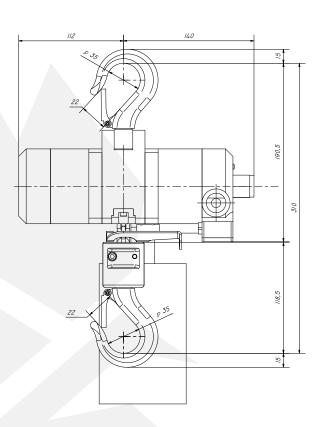


HOIST MODEL	TCR-250
WLL	250 kg
CHAIN FALLS	1
LIFTING SPEED WITH LOAD	9.3 m/min
LIFTING SPEED WITHOUT LOAD	19.0 m/min
LOWERING SPEED WITH LOAD	17.9 m/min
AIR CONSUMPTION LIFTING	13 l/sec
AIR CONSUMPTION LOWERING	15 l/sec
WORKING PRESSURE	6 Bar
AIR CONNECTION	1/2" BSP
MINIMUM HOSE DIA.	1/2"
WEIGHT 3M HOL	7.0 kg
ADDITIONAL METRE HOL	0.35 kg


TCR-500/2 AIR HOIST



RAISING EXPECTATIONS

DIMENSIONS

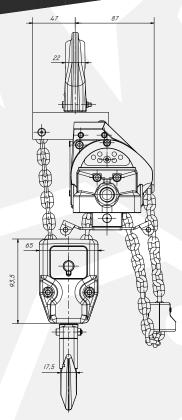

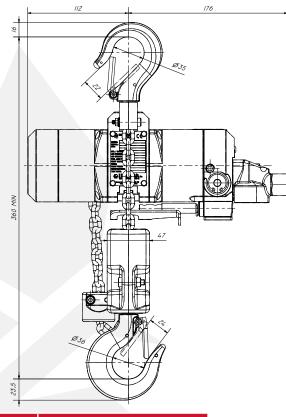


HOIST MODEL	TCR-500/2
WLL	500 kg
CHAIN FALLS	2
LIFTING SPEED WITH LOAD	4.6 m/min
LIFTING SPEED WITHOUT LOAD	9.5 m/min
LOWERING SPEED WITH LOAD	9 m/min
AIR CONSUMPTION LIFTING	13 l/sec
AIR CONSUMPTION LOWERING	15 l/sec
WORKING PRESSURE	6 Bar
AIR CONNECTION	1/2" BSP
MINIMUM HOSE DIA.	1/2"
WEIGHT 3M HOL	9.0 kg
ADDITIONAL METRE HOL	0.7 kg


TCR-500 AIR HOIST



RAISING EXPECTATIONS

DIMENSIONS

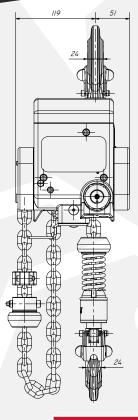

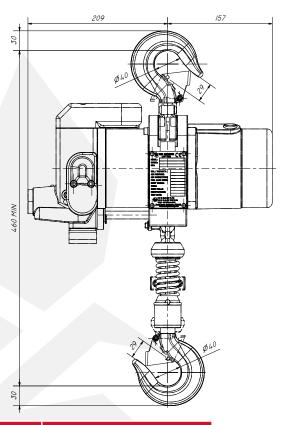


HOIST MODEL	TCR-500
WLL	500 kg
CHAIN FALLS	1
LIFTING SPEED WITH LOAD	10.5 m/min
LIFTING SPEED WITHOUT LOAD	16.0 m/min
LOWERING SPEED WITH LOAD	17.9 m/min
AIR CONSUMPTION LIFTING	25 Vsec
AIR CONSUMPTION LOWERING	27 l/sec
WORKING PRESSURE	6 Bar
AIR CONNECTION	1/2" BSP
MINIMUM HOSE DIA.	1/2"
WEIGHT 3M HOL	31 kg
ADDITIONAL METRE HOL	0.8 kg


TCR-1000/2 AIR HOIST



RAISING EXPECTATIONS

DIMENSIONS

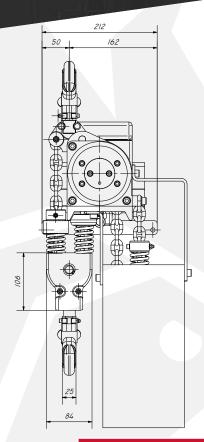

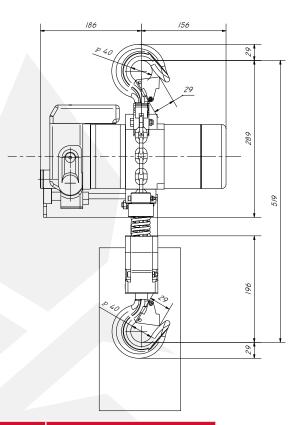


HOIST MODEL	TCR-1000/2
WLL	1000 kg
CHAIN FALLS	2
LIFTING SPEED WITH LOAD	5.3 m/min
LIFTING SPEED WITHOUT LOAD	9.5 m/min
LOWERING SPEED WITH LOAD	9.0 m/min
AIR CONSUMPTION LIFTING	25 l/sec
AIR CONSUMPTION LOWERING	27 l/sec
WORKING PRESSURE	6 Bar
AIR CONNECTION	1/2" BSP
MINIMUM HOSE DIA.	1/2"
WEIGHT 3M HOL	35.2 kg
ADDITIONAL METRE HOL	1.6 kg


TCR-1000 AIR HOIST



RAISING EXPECTATIONS

DIMENSIONS

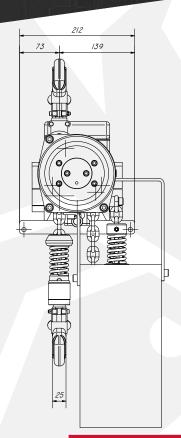

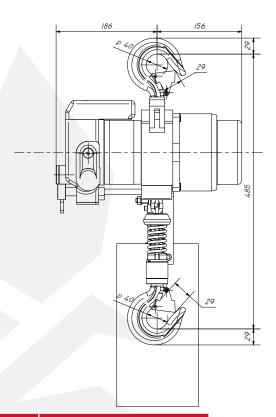


HOIST MODEL	TCR-1000
WLL	1000 kg
CHAIN FALLS	1
LIFTING SPEED WITH LOAD	6.0 m/min
LIFTING SPEED WITHOUT LOAD	11.3 m/min
LOWERING SPEED WITH LOAD	10.3 m/min
AIR CONSUMPTION LIFTING	25 l/sec
AIR CONSUMPTION LOWERING	28 l/sec
WORKING PRESSURE	6 Bar
AIR CONNECTION	1/2" BSP
MINIMUM HOSE DIA.	1/2"
WEIGHT 3M HOL	34.0 kg
ADDITIONAL METRE HOL	1.1 kg


TCR-2000/2 AIR HOIST



RAISING EXPECTATIONS

DIMENSIONS

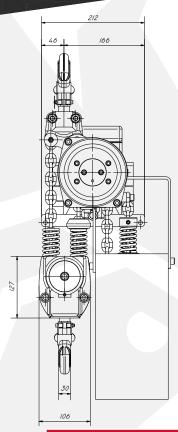

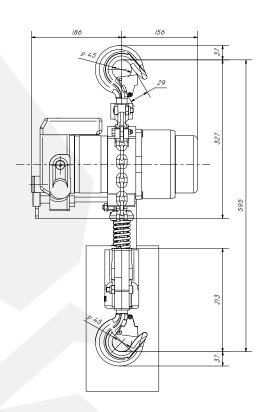

HOIST MODEL	TCR-2000/2
WLL	2000 kg
CHAIN FALLS	2
LIFTING SPEED WITH LOAD	3.0 m/min
LIFTING SPEED WITHOUT LOAD	5.7 m/min
LOWERING SPEED WITH LOAD	5.2 m/min
AIR CONSUMPTION LIFTING	25 l/sec
AIR CONSUMPTION LOWERING	30 l/sec
WORKING PRESSURE	6 Bar
AIR CONNECTION	1/2" BSP
MINIMUM HOSE DIA.	1/2"
WEIGHT 3M HOL	39.7 kg
ADDITIONAL METRE HOL	2.2 kg